


# Model 1800B

## Direct Fired Heater


**Component upgrades virtually eliminate electrical service calls**

- Dual-fuel quick change over from propane to natural gas
- Can be utilized as make-up air heater
- Efficient motor reduces amp draw and is rated to run on standard 15 amp circuit
- Remote (50' long) thermostat with Hi/Lo/Off control
- 12" wheels make for easy handling
- Relays pull in and hold tight down to 95V
- Ductable up to 50 ft.
- Upgraded heater control board . . .
  - starts heater with low voltage down to 95V
  - potted control board minimizes moisture and vibration
- Diagnostic troubleshooting lights
- Can run fan only as an industrial blower



SPECIFICATIONS	
Input	750,000 - 450,000 BTU/Hr
Fuel	Vapor Propane/Natural Gas
Gas Consumption	8.3 GPH Propane/750 CFH NG
Gas Connection	3/4" FNPT
Electrical	120 Volts 15 amp circuit
Fan	4200 CFM, 1 HP, 1/2" W.C. SP
Duct (optional)	WD2010UHT
Thermostat	2 Stage Hi/Lo/Off w/50' Remote
Temp Rise	385°F
Actual Dimensions	31.5"H x 48.5"L x 26"W
Weight	200 lbs.

# heat wagon

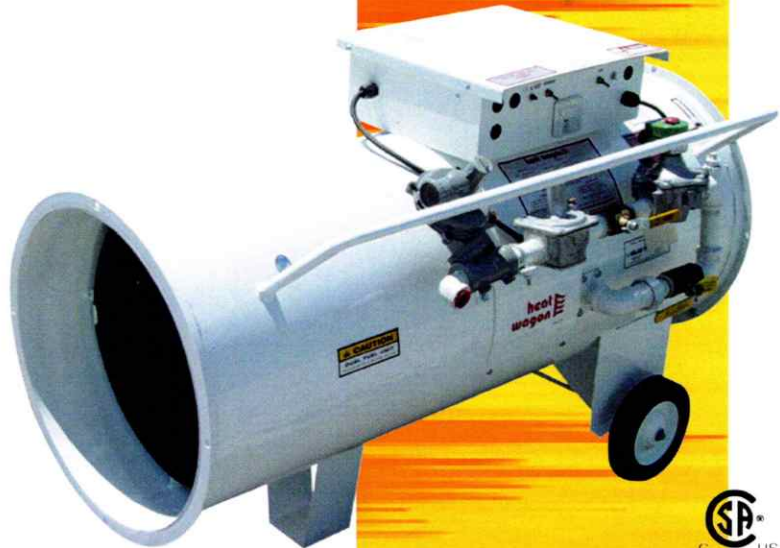

Model 1800BL available as liquid withdrawal unit.



Gas Supply:	Inlet Pressure	
	Min PSI	Max PSI
Propane	2	10
Natural	2	10

(Minimum inlet pressure is for purpose of input adjustment)